


M4 SCOOT

- MINERAL -

SPECIFIC

Standards : JASO MA2 – API SJ




● Available grade:

20W50

M4 Scoot is a good quality mineral lubricant for 4-stroke motorcycles that ensures complete lubrication and protection of your engine.

● Packaging:

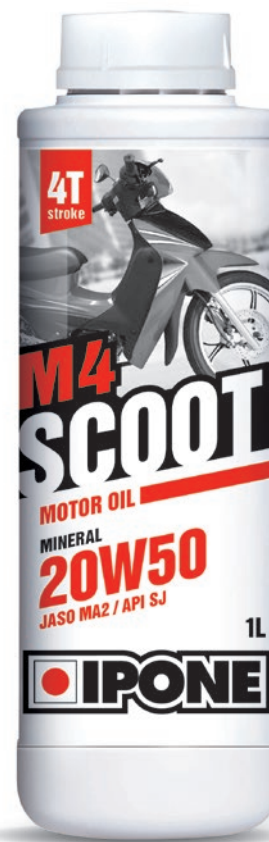

● Technical data:

TEST	METHOD	TYPICAL VALUES	UNITS OF MESURE
		20W50	
DENSITY AT 20° C	ISO12185	0,875	G/cm ³
VISCOSITY AT 100° C	ASTM D445	18	mm ² /s
VISCOSITY AT 40° C	ASTM D445	159,6	mm ² /s
VISCOSITY INDEX (VIE)	ASTM D 2270	119	-
FLASH POINT	ASTM D92	231	°C
POUR POINT	ASTM D97	-24	°C
TBN	ASTM D2896	7,3	mgKOH/g
TAN	ASTM D664	1,96	mgKOH/g



La Meunière - CS 10001 - FR 13480 CABRIÈS - TÉL. : +33 4 42 94 05 65 - Fax : +33 4 42 94 05 66

info@ipone.fr - www.ipone.com - /iponelube - /iponelube - iponelube