

ROAD TWIN

- SYNTHETIC -

SPECIFIC

Standards : JASO MA2 – API SL



● Available grade:

15W50


Road Twin is a good-quality, synthetic lubricant for 4-stroke motorcycles, formulated for V engines with a large cylinder capacity. **Road Twin** ensures complete lubrication and protection of your engine.



● Packaging:

● Technical data:

TEST	METHOD	TYPICAL VALUES	UNITS OF MESURE
		15W50	
DENSITY AT 20° C	ISO12185	0,879	G/cm ³
VISCOSITY AT 100° C	ASTM D445	17,8	mm ² /s
VISCOSITY AT 40° C	ASTM D445	144,2	mm ² /s
VISCOSITY INDEX (VIE)	ASTM D 2270	137	-
FLASH POINT	ASTM D92	228	°C
POUR POINT	ASTM D97	-30	°C
TBN	ASTM D2896	9	mgKOH/g
TAN	ASTM D664	2,2	mgKOH/g

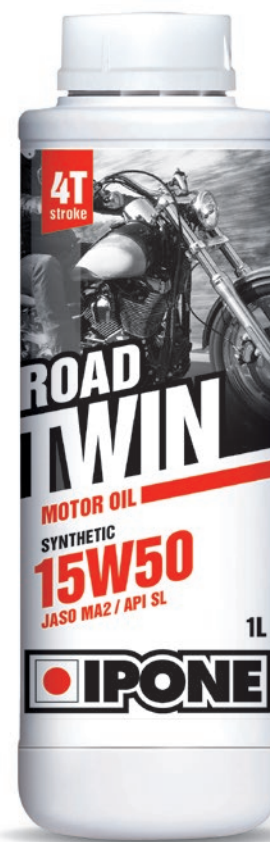

La Meunière - CS 10001 - FR 13480 CABRIÈS - TÉL. : +33 4 42 94 05 65 - Fax : +33 4 42 94 05 66

info@ipone.fr - www.ipone.com - /iponelube - /iponelube - iponelube