

# ATV KATANA

- 100% SYNTHETIC -

## SPORTS

Standards : JASO MA2 – API SM



### ● Available grade:

5W40


**Katana ATV** is a 100% synthetic lubricant for 4-stroke quad-bikes, designed to deliver good off-road sports riding performance. Its formula ensures maximum performance and optimal engine lubrication.



### ● Packaging:

### ● Technical data:

TEST	METHOD	TYPICAL VALUES	UNITS OF MESURE
		5W40	
DENSITY AT 20° C	ISO12185	0,859	G/cm <sup>3</sup>
VISCOSITY AT 100° C	ASTM D445	13,6	mm <sup>2</sup> /s
VISCOSITY AT 40° C	ASTM D445	81,5	mm <sup>2</sup> /s
VISCOSITY INDEX (VIE)	ASTM D 2270	171	-
FLASH POINT	ASTM D92	226	°C
POUR POINT	ASTM D97	-36	°C
TBN	ASTM D2896	9,1	mgKOH/g
TAN	ASTM D664	2,7	mgKOH/g

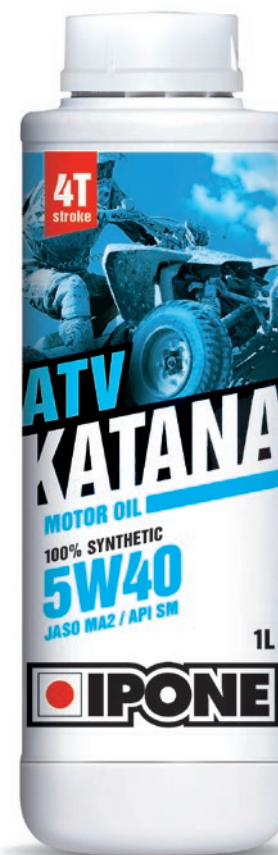

La Meunière - CS 10001 - FR 13480 CABRIÈS - TÉL. : +33 4 42 94 05 65 - Fax : +33 4 42 94 05 66

info@ipone.fr - www.ipone.com - /iponelube - /iponelube - iponelube